



GSP-730 & GRF-1300

3GHz Spectrum Analyzer & RF and Communication Trainer

GSP-730 FEATURES

- Frequency Range : 150kHz ~ 3GHz
- Autoset Function
- Noise level : $\leq -100\text{dBm}$
- RBW Range : 30kHz, 100kHz, 300kHz, 1MHz
- ACPR/CHPW/OCBW Measurement
- 3 Traces in Different Colors
- Split Window Function
- Limit Line Function
- Remote Control Software
- Presentation Material for Training Courses
- Support Interface : USB Device/Host, RS-232C
- 5.6" TFT LCD with VGA Output

GRF-1300 FEATURES

- Waveform Support :
 - Sine Wave : 0.1 ~ 3MHz
 - Square Wave : 0.1 ~ 3MHz
 - Triangle Wave : 0.1 ~ 3MHz
- RF Frequency : 870 ~ 920MHz
- AM Modulation & FM Modulation
- 5 On/Off Switches and 5 Test Points to Simulate 8 Failure Conditions for Learning Outcome Test
- USB Interface to Provide Remote Control

Turn-key Solution for RF and Communication Experiment Courses

CTS GSP-730 is a 3GHz Spectrum Analyzer mainly developed to fulfill the demands of RF Communication educations. Budget constraint and insufficient teaching tools are normally the two hurdles for schools to provide high-quality courses for RF communication experiments. GSP-730, featuring full functions, a moderate spectrum analyzer should provide, along with GRF-1300 RF communication trainer possesses a unique position in the field as an economic turn-key solution for 3GHz RF Communication Experiment courses.

A TURN-KEY SOLUTION TO CLEAR AWAY TWO OBSTACLES


GSP-730, carrying 3GHz bandwidth and measurement functions including Autoset, Split Window, Limit Line, ACPR and OCBW etc., is regarded as the advanced educations of Mobile Communications (GSM, 3G, 4G/LTE...), Wi-Fi, Zigbee and RFID in the Electronic or the Communication classes. The USB ports, the RS-232 interface and the VGA video output facilitate the teaching efficiency. The combination of GSP-730 and GRF-1300 RF communication training is a turn-key system for both lecture and hands-on training purposes.

GRF-1300 RF communication trainer, as the counterpart of GSP-730 for the basic RF communication experiment system, is capable of generating a baseband signal and a RF carrier signal for the built-in AM and FM communication operations. The baseband signal output contains the selections of Sine, Triangle, and Square waveforms in the frequency range of 100kHz ~ 3MHz, whereas the RF signal output is a frequency-variable Sine wave in the range of 870 ~ 920 MHz. Connecting the baseband signal output with AM or FM inputs on the panel, GRF-1300 produces AM or FM signal output respectively by using the internal RF signal as the modulation carrier according to user's selected frequency.

An Experiment Textbook (student's book) is available as the standard accessory of GRF-1300 to provide experiment courses. The curriculum of the textbook includes the introduction of the frequency domain and the time domain concepts, the operation theories of a spectrum analyzer, and nine experiments to perform hands-on training for the learning of basic RF communication theories and the RF measurement techniques using a spectrum analyzer. A CD, containing power-point slides for course presentation and the remote-control software for experiment, is attainable with GRF-1300, allowing teacher to give lecture of experiment theories and perform experiment simultaneously.

Another Experiment Textbook (teacher's book) is accessible as an optional accessory of GRF-1300. In addition to the same contents in the student's book, this book provides the experiment results to the questions and as well as some advanced experiment theories. Thus, a section of test-for-learning outcomes can also be seen in the lecturers' material in order to guide the students from the faulty diagnosis to the correct one in a RF communication circuitry. On the GRF-1300 panel, there are five test points set at different joints of circuit blocks. Through turning on or off the corresponding relays of the five test points enables the teachers to simulate the faults and teach students diagnosis technique.

The economic solution of GSP-730 and GRF-1300 greatly lowers the budget barriers for providing fundamental RF Communication Educations and facilitate the establishment of RF communication experiment labs with more training stations in schools.

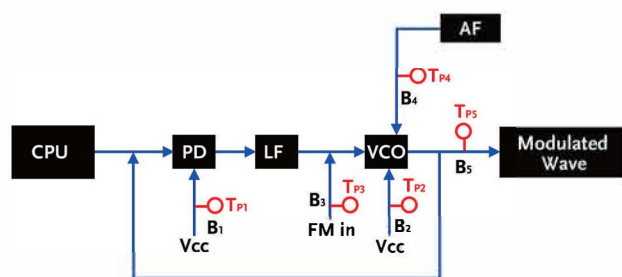

- **Introductions of Frequency Domain , Time Domain , and Spectrum Analyzer Basics.**

- **9 Experiments Include**

- Operations of Spectrum Analyzer
- Base band and RF signal measurements
- AM and FM signal measurements
- Communication system and product measurements

- **Learning Outcome Tests**

- **Auxiliary Tools**

- PPT files including all experiments contents
- Remote control software to control GRF-1300, GSP-730 simultaneously
- Experiment text books including the student version and the teacher(optional)

A. AN ECONOMIC TURN-KEY SOLUTION




Fully-electronic RF Training System

In class, teacher can connect GSP-730 and GRF-1300 with PC via USB or RS-232 interface. First of all, all the contents of experiment has been converted into power-point slide and provided as the in-class materials. During lecturing the power-point slides, both GSP-730 and GRF-1300 can be remotely set by GRF Training System Control Software. Moreover, the signal shown on GSP-730 can be transferred to PC screen for further research. As a result, GSP-730 and GRF-1300 form an inclusive electronic-teaching-material

package which efficiently simplifies lecturers' tasks before classes and shortens the process of the material preparation, and meanwhile, enhances the quality of the lecture. If the PC can only offer one USB interface, an extra purchase of USB hub* may solve the problem of insufficient USB interfaces. With proper installation, PC can manage the conjunction of GSP-730 and GRF-1300.


* USB hub is excluded from the product standard accessories.

B. PC SOFTWARE FOR GSP-730 and GRF-1300 REMOTE CONTROL

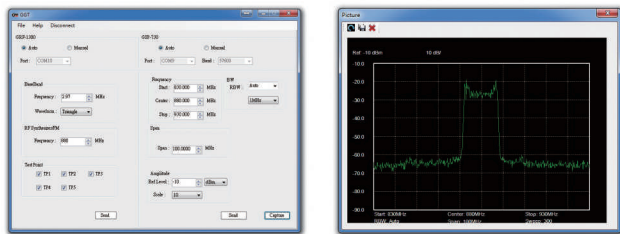


The dedicated PC software, Primary RF, is provided to support the remote control of GSP-730 and GRF-1300 simultaneously. The control includes base band signal waveform, frequency and RF signal frequency for GRF-1300 and Frequency, Span, Amplitude, RBW and spectrum transferring of GSP-730.

C. AUTOSET FUNCTION

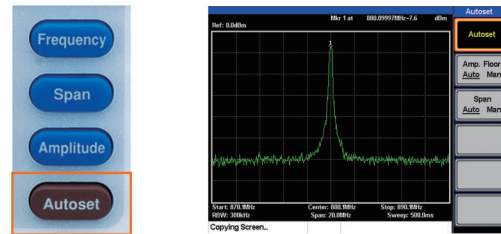


The Autoset function automatically captures the signal and configures an appropriate setting for the optimum spectrum display at just one press of the button. With the Autoset function, using a spectrum analyzer like GSP-730 is no longer an annoying and complicated task.

D. THREE-TRACE DISPLAY WITH THREE-COLOR IDENTITY




The GSP-730 can illustrate a signal with three colors simultaneously under various display modes, including Clear/Write, Max-Peak Hold, Min-Peak Hold, View, Blank and Average. Other useful trace functions such as trace math operations are also accomplishable.

E. MARKER FUNCTION




Five Markers can be used to obtain the measurement readings of specified points. Each marker has a counterpart Δ Marker, the amplitude difference can be measured and indicated by setting the frequency of marker and the interval frequency of Δ Marker between two signals. While several pairs of Markers are used for marking more than one pair of signals at the same time, the Marker Table can be turned on and it can process all the tests and demonstrate the reading figures.

F. SETTING STATUS PRESENTED BY ICONS

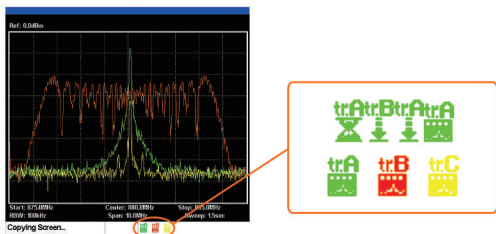


The intuitive icons help user grasp the current setting conditions all the time. As all status icons are clearly shown at the corner of the screen, there is no need to worry about the unknown settings, which may cause confusion and lead to measurement errors.

H. PASS/FAIL JUDGMENTS




This function may run the "Pass" and "Fail" inspection with efficiency. Firstly, a limit line or upper and lower limit lines should be edited as the judgment criterion, then the LCD will display "Pass" or "Fail" according to whether the input signal meets the condition defined by the limit lines to indicate the examined outcome.

J. FLEXIBLE INTERFACE

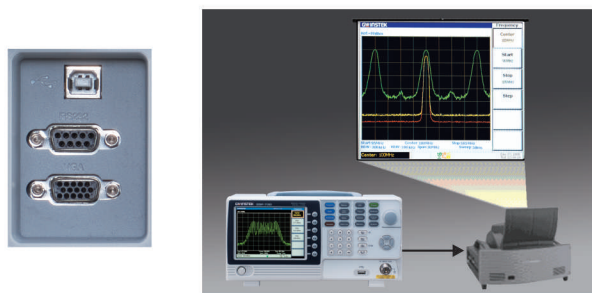


The USB host interface on GSP-730 front panel allows the measuring diagrams to be saved in the memory stick. The USB Device and RS232 interfaces on the rear panel are capable of connecting with PC for remote control. VGA output can transfer

G. SPLIT-WINDOW DISPLAY IN LIVE MODE




Under Split Window Display Mode, the monitor will display two independent screens, which can respectively have separated settings. For instance, if processing the test between fundamental and harmonic signals, the separated screens can respectively set at different frequencies at the same time in order to process the measurement.

I. POWER MEASUREMENT FUNCTION




ACPR



OCBW

GSP-730 provides measurement functions such as ACPR, OCBW, and Channel Power. These items are regulated to be tested in recent communication systems, such as CDMA system. GSP-730 will illustrate channels by various colors so that the operation may become more precise and may minimize the errors.

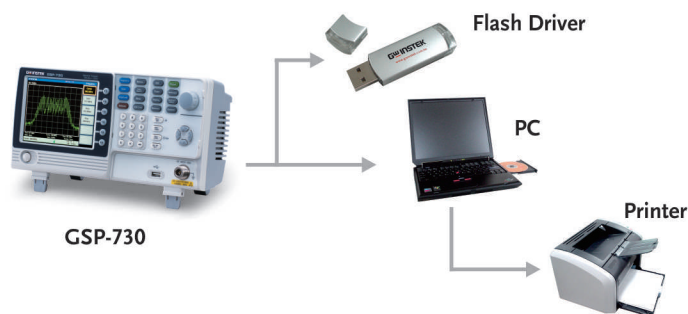

whatever demonstrated on the LCD display to other display device or projector, which will strengthen the impression while giving the lectures.



GSP-730


3GHz Spectrum Analyzer

1. LCD Display
2. Function Keys
3. Menu Keys
4. Hardcopy Key
5. Scroll
6. Arrow Key
7. RF Input Terminal
8. USB Host Port
9. Keypad and Unit Keys
10. Power Key
11. USB Device Port
12. RS-232C Port
13. VGA Port
14. Fan
15. Power Socket



GRF-1300

RF and Communication Trainer

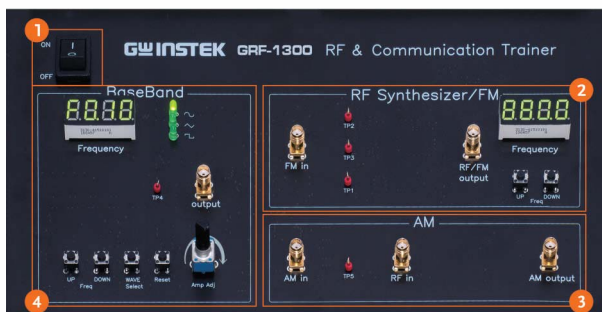

1. Power Key
2. RF Synthesizer / FM Function Block
3. AM Function Block
4. Base Band Function Block

SPECIFICATIONS

GSP-730																															
FREQUENCY	<table border="0"> <tr> <td style="padding-right: 10px;">Frequency Range</td> <td>Setting Range</td> <td>150kHz ~ 3GHz</td> </tr> <tr> <td>Center Frequency</td> <td>Setting Resolution</td> <td>0.1MHz</td> </tr> <tr> <td>Frequency Span</td> <td>Accuracy</td> <td>within ± 50kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$C)</td> </tr> <tr> <td>Resolution Bandwidth</td> <td>Setting range</td> <td>1MHz ~ 3GHz</td> </tr> <tr> <td>SSB Phase Noise</td> <td>Accuracy</td> <td>within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$C)</td> </tr> <tr> <td>Inherent Spurious Response</td> <td>Setting Range</td> <td>30kHz, 100kHz, 300kHz, 1MHz</td> </tr> <tr> <td></td> <td></td> <td>-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)</td> </tr> <tr> <td></td> <td></td> <td>less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)</td> </tr> </table>	Frequency Range	Setting Range	150kHz ~ 3GHz	Center Frequency	Setting Resolution	0.1MHz	Frequency Span	Accuracy	within ± 50 kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)	Resolution Bandwidth	Setting range	1MHz ~ 3GHz	SSB Phase Noise	Accuracy	within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)	Inherent Spurious Response	Setting Range	30kHz, 100kHz, 300kHz, 1MHz			-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)			less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)						
Frequency Range	Setting Range	150kHz ~ 3GHz																													
Center Frequency	Setting Resolution	0.1MHz																													
Frequency Span	Accuracy	within ± 50 kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)																													
Resolution Bandwidth	Setting range	1MHz ~ 3GHz																													
SSB Phase Noise	Accuracy	within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)																													
Inherent Spurious Response	Setting Range	30kHz, 100kHz, 300kHz, 1MHz																													
		-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)																													
		less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)																													
AMPLITUDE	<table border="0"> <tr> <td style="padding-right: 10px;">Reference Level</td> <td>Input Range</td> <td>+20 ~ -40dBm</td> </tr> <tr> <td>Average Noise Level</td> <td>Accuracy</td> <td>Within ± 2dB (1GHz) ; SPAN : 5MHz</td> </tr> <tr> <td>Frequency Characteristic</td> <td>Unit</td> <td>dBm, dBV, dBμV</td> </tr> <tr> <td>Input</td> <td></td> <td>≤ -100dBm (typical, center frequency : 1GHz RBW : 30kHz)</td> </tr> <tr> <td></td> <td></td> <td>within ± 3.0dB@300MHz ~ 2.6GHz</td> </tr> <tr> <td></td> <td></td> <td>within ± 6.0dB@80 ~ 300MHz, 2.6 ~ 3GHz</td> </tr> <tr> <td></td> <td>Input Impedance</td> <td>50Ω</td> </tr> <tr> <td></td> <td>Input VSWR</td> <td>less than 2.0@input att≥ 10dB</td> </tr> <tr> <td></td> <td>Input damage level</td> <td>+30dBm (CW average power), 25VDC</td> </tr> <tr> <td></td> <td>Input connector</td> <td>N connector</td> </tr> </table>	Reference Level	Input Range	+20 ~ -40dBm	Average Noise Level	Accuracy	Within ± 2 dB (1GHz) ; SPAN : 5MHz	Frequency Characteristic	Unit	dBm, dBV, dB μ V	Input		≤ -100 dBm (typical, center frequency : 1GHz RBW : 30kHz)			within ± 3.0 dB@300MHz ~ 2.6GHz			within ± 6.0 dB@80 ~ 300MHz, 2.6 ~ 3GHz		Input Impedance	50 Ω		Input VSWR	less than 2.0@input att ≥ 10 dB		Input damage level	+30dBm (CW average power), 25VDC		Input connector	N connector
Reference Level	Input Range	+20 ~ -40dBm																													
Average Noise Level	Accuracy	Within ± 2 dB (1GHz) ; SPAN : 5MHz																													
Frequency Characteristic	Unit	dBm, dBV, dB μ V																													
Input		≤ -100 dBm (typical, center frequency : 1GHz RBW : 30kHz)																													
		within ± 3.0 dB@300MHz ~ 2.6GHz																													
		within ± 6.0 dB@80 ~ 300MHz, 2.6 ~ 3GHz																													
	Input Impedance	50 Ω																													
	Input VSWR	less than 2.0@input att ≥ 10 dB																													
	Input damage level	+30dBm (CW average power), 25VDC																													
	Input connector	N connector																													
SWEEP	<table border="0"> <tr> <td style="padding-right: 10px;">Sweep Time</td> <td>Setting Range</td> <td>300ms ~ 8.4s, auto (not adjustable)</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>within $\pm 2\%$ (frequency span : full span)</td> </tr> </table>	Sweep Time	Setting Range	300ms ~ 8.4s, auto (not adjustable)		Accuracy	within $\pm 2\%$ (frequency span : full span)																								
Sweep Time	Setting Range	300ms ~ 8.4s, auto (not adjustable)																													
	Accuracy	within $\pm 2\%$ (frequency span : full span)																													
GENERAL	<table border="0"> <tr> <td style="padding-right: 10px;">Display</td> <td>640 x 480 RGB color LCD</td> </tr> <tr> <td>Communication Interface</td> <td>RS-232C Sub-D female-D 9 pins</td> </tr> <tr> <td>VGA Output</td> <td>Sub-D female 15 pins</td> </tr> <tr> <td>Power Source</td> <td>AC 100~240V, 50/60Hz</td> </tr> <tr> <td></td> <td>USB Connector USB Host/Device full speed supported</td> </tr> </table>	Display	640 x 480 RGB color LCD	Communication Interface	RS-232C Sub-D female-D 9 pins	VGA Output	Sub-D female 15 pins	Power Source	AC 100~240V, 50/60Hz		USB Connector USB Host/Device full speed supported																				
Display	640 x 480 RGB color LCD																														
Communication Interface	RS-232C Sub-D female-D 9 pins																														
VGA Output	Sub-D female 15 pins																														
Power Source	AC 100~240V, 50/60Hz																														
	USB Connector USB Host/Device full speed supported																														
OTHER	<table border="0"> <tr> <td style="padding-right: 10px;">Operating Temperature</td> <td>5 ~ 45°C (Guaranteed at 25 $\pm 5^\circ$C, without soft carrying case)</td> </tr> <tr> <td>Operating Humidity</td> <td>Less than 45°C / 90%RH</td> </tr> <tr> <td>Storage Temperature</td> <td>-20 ~ 60°C, less than 60°C / 70%RH</td> </tr> </table>	Operating Temperature	5 ~ 45°C (Guaranteed at 25 $\pm 5^\circ$ C, without soft carrying case)	Operating Humidity	Less than 45°C / 90%RH	Storage Temperature	-20 ~ 60°C, less than 60°C / 70%RH																								
Operating Temperature	5 ~ 45°C (Guaranteed at 25 $\pm 5^\circ$ C, without soft carrying case)																														
Operating Humidity	Less than 45°C / 90%RH																														
Storage Temperature	-20 ~ 60°C, less than 60°C / 70%RH																														
DIMENSIONS & WEIGHT	296(L) x 153(W) x 105(H) mm / 11.6(L) x 6(W) x 4.1(H) in Approx. 2.2kg / 4.9lb																														
GRF-1300																															
BASE BAND	<table border="0"> <tr> <td style="padding-right: 10px;">Waveforms</td> <td>Sine, Square, Triangle</td> </tr> <tr> <td>Frequency Range</td> <td>0.1 ~ 3MHz ; Step : 10kHz</td> </tr> <tr> <td>Amplitude</td> <td>≥ 1.5Vpp</td> </tr> <tr> <td>Harmonics Distortion</td> <td>≥ -30dBc</td> </tr> </table>	Waveforms	Sine, Square, Triangle	Frequency Range	0.1 ~ 3MHz ; Step : 10kHz	Amplitude	≥ 1.5 Vpp	Harmonics Distortion	≥ -30 dBc																						
Waveforms	Sine, Square, Triangle																														
Frequency Range	0.1 ~ 3MHz ; Step : 10kHz																														
Amplitude	≥ 1.5 Vpp																														
Harmonics Distortion	≥ -30 dBc																														
RF/FM GENERATOR	<table border="0"> <tr> <td style="padding-right: 10px;">Frequency Accuracy</td> <td>± 0.15MHz</td> </tr> <tr> <td>Adjustable Range</td> <td>≥ 45MHz (870M ~ 920MHz) ; Step: 1MHz</td> </tr> <tr> <td>Power Range</td> <td>≥ -15dBm</td> </tr> </table>	Frequency Accuracy	± 0.15 MHz	Adjustable Range	≥ 45 MHz (870M ~ 920MHz) ; Step: 1MHz	Power Range	≥ -15 dBm																								
Frequency Accuracy	± 0.15 MHz																														
Adjustable Range	≥ 45 MHz (870M ~ 920MHz) ; Step: 1MHz																														
Power Range	≥ -15 dBm																														
FM	Max Frequency Deviation >3MHz																														
AM	Peak Difference ≥ -18 dBm																														
INTERFACE	USB USB Device																														
DIMENSIONS & WEIGHT	165(W) x 155(H) x 90(D)mm / 6.5(W) x 6.1(H) x 3.5(D)in Approx. 1.2kg / 2.6lb																														

Specifications subject to change without notice. SP-730GD1BH

ORDERING INFORMATION

GSP-730 3GHz Spectrum Analyzer
GRF-1300 RF and Communication System Trainer

ACCESSORIES

GSP-730 : Quick start manual x 1, User manual CD x 1, Power cord x1
GRF-1300 : Experiment text book of student version, Power point file and remote control software CD,
 RF cable x 3, Antenna x 1, N to SMA adaptor connector, Power cord x 1

OPTION

GBK-001 Experiment text book of teacher version

FREE DOWNLOAD

PC Software Training system remote control software

Combined Test Solutions,
4 Commerce Way, Stanbridge Road,
Leighton Buzzard, LU7 4RW

T: 01525 374466
E: sales@ctstest.co.uk
W: www.ctstest.co.uk

