



## GSP-730/GRF-1300A/ USG-LF44

### FEATURES

#### GSP-730 Spectrum Analyzer

- Frequency Range : 150kHz ~ 3GHz
- Autoset Function
- Noise level :  $\leq -100\text{dBm}$
- RBW Range : 30kHz, 100kHz, 300kHz, 1MHz
- ACPR/CHPW/OCBW Measurement
- 3 Traces in Different Colors
- Split Window Function
- Limit Line Function
- Remote Control Software
- Presentation Material for Training Courses
- Support Interface : USB Device/Host, RS-232C
- 5.6" TFT LCD with VGA Output

#### GRF-1300A RF and Communication Trainer

- Waveform Support :  
Sine Wave : 0.1 ~ 3MHz  
Square Wave : 0.1 ~ 3MHz  
Triangle Wave : 0.1 ~ 3MHz
- RF Frequency : 870 ~ 920MHz
- AM Modulation & FM Modulation
- 5 On/Off Switches and 5 Test Points to Simulate 8 Failure Conditions for Learning Outcome Test
- USB Interface to Provide Remote Control
- Mixer & 2.4GHz Band Pass Filter


#### USG-LF44 RF Signal Generator

- Frequency Range : 34.5MHz ~ 4400MHz
- Output Power Range : -30dBm ~ 0dBm
- Continuous Wave Signal Without any Modulation
- Support Fixed Frequency, Frequency Sweep, Frequency Hopping & Power Sweep Mode
- -107dBc/Hz Phase Noise@100kHz Offset
- Frequency Resolution : 10kHz
- PC USB Interface Powered and Controlled
- External PC Software Support Different Operating System

## Turn-key Solution for RF and Communication Experiment Courses

GSP-730 is a 3 GHz Spectrum Analyzer developed mainly to fulfill the demands of RF Communications education. Budget constraint and inadequate teaching tools are normally the two hurdles for schools to provide high-quality courses for RF communications experiments. GSP-730, a spectrum analyzer of full functions, combines with the GRF-1300A training kit to provide customer an economical turn-key solution for 3GHz RF and Communications Experiment Courses.

Properly connect GSP-730 Spectrum Analyzer, GRF-1300A RF and Communications Trainer, USG-LF44 RF Signal Generator and a PC to perform ongoing experiments while the lecture is being given. Using a PC, teacher can present teaching material with Power Point slides and simultaneously control GSP-730, GRF-1300A and USG-LF44 to perform experiments and get spectrum displays parameter readings on the PC screen. GSP-730, GRF-1300A and USG-LF44 easily transfer the current teaching materials including the PowerPoint slides, textbook and the remote control software into electronic-teaching system.

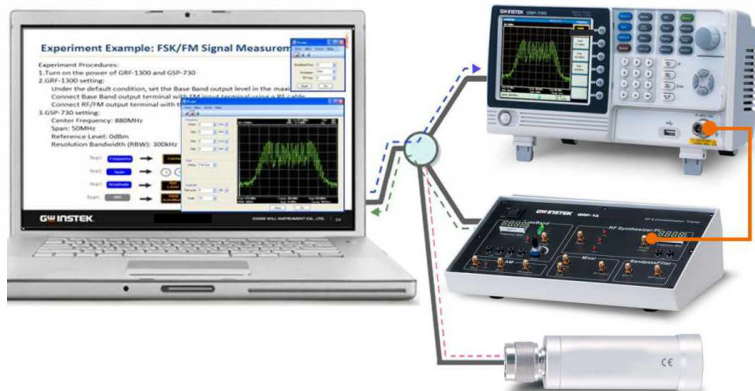

The combination of GSP-730, GRF-1300A and USG-LF44 forms a fundamental training system for RF communications and telecommunications classes in the universities, colleges, vocational schools and the training center in military as well as the private companies. Instead of the tremendous cost of the installation of new training system, the conjunction of GSP-730, GRF-1300A and USG-LF44 provides an economical solution to eliminate two obstacles, budget constraint and insufficiency of teaching tools.

### APPLICATIONS

- Education, Training
- Fourier Theory Investigation
- Motherboard Circuit Measurement
- Scalar Network Analyzer
- Wireless Communication Signal Measurements
  - GSM, 3G, 4G Mobile Phone
  - Bluetooth, Zigbee, Wi-Fi
  - AM/FM Modulation
- Remote Controller Maintenance

GSP-730/GRF-1300A/USG-LF44

## SPECIFICATIONS

GSP-730																															
<b>FREQUENCY</b>	<table border="1"> <tr> <td>Frequency Range</td> <td>Setting Range</td> <td>150kHz ~ 3GHz</td> </tr> <tr> <td>Center Frequency</td> <td>Setting Resolution</td> <td>0.1MHz</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>within <math>\pm 50</math>kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 <math>\pm 5^\circ</math>C)</td> </tr> <tr> <td>Frequency Span</td> <td>Setting range</td> <td>1MHz ~ 3GHz</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>within <math>\pm 3\%</math> (frequency span : 0.3GHz ~ 2.6GHz, 20 <math>\pm 5^\circ</math>C)</td> </tr> <tr> <td>Resolution Bandwidth</td> <td>Setting Range</td> <td>30KHz, 100KHz, 300KHz, 1MHz</td> </tr> <tr> <td>SSB Phase Noise</td> <td></td> <td>-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)</td> </tr> <tr> <td>Inherent Spurious Response</td> <td></td> <td>less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)</td> </tr> </table>	Frequency Range	Setting Range	150kHz ~ 3GHz	Center Frequency	Setting Resolution	0.1MHz		Accuracy	within $\pm 50$ kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)	Frequency Span	Setting range	1MHz ~ 3GHz		Accuracy	within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)	Resolution Bandwidth	Setting Range	30KHz, 100KHz, 300KHz, 1MHz	SSB Phase Noise		-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)	Inherent Spurious Response		less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)						
Frequency Range	Setting Range	150kHz ~ 3GHz																													
Center Frequency	Setting Resolution	0.1MHz																													
	Accuracy	within $\pm 50$ kHz (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)																													
Frequency Span	Setting range	1MHz ~ 3GHz																													
	Accuracy	within $\pm 3\%$ (frequency span : 0.3GHz ~ 2.6GHz, 20 $\pm 5^\circ$ C)																													
Resolution Bandwidth	Setting Range	30KHz, 100KHz, 300KHz, 1MHz																													
SSB Phase Noise		-85dBc/Hz (typical, 500kHz offset, RBW : 30kHz, Sweep time : 1.5s, Span : 1MHz@1GHz)																													
Inherent Spurious Response		less than -45dBc@-40dBm Ref. Level (typical less than -50dBc)																													
<b>AMPLITUDE</b>	<table border="1"> <tr> <td>Reference Level</td> <td>Input Range</td> <td>+20 ~ -40dBm</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>Within <math>\pm 2</math>dB (1GHz) ; SPAN : 5MHz</td> </tr> <tr> <td></td> <td>Unit</td> <td>dBm, dBV, dB<math>\mu</math>V</td> </tr> <tr> <td>Average Noise Level</td> <td></td> <td><math>\leq -100</math>dBm (typical, center frequency : 1GHz RBW : 30kHz)</td> </tr> <tr> <td>Frequency Characteristic</td> <td></td> <td>within <math>\pm 3.0</math>dB@300MHz ~ 2.6GHz</td> </tr> <tr> <td></td> <td></td> <td>within <math>\pm 6.0</math>dB@80 ~ 300MHz, 2.6 ~ 3GHz</td> </tr> <tr> <td>Input</td> <td>Input Impedance</td> <td>50<math>\Omega</math></td> </tr> <tr> <td></td> <td>Input VSWR</td> <td>less than 2.0@input att<math>\geq 10</math>dB</td> </tr> <tr> <td></td> <td>Input damage level</td> <td>+30dBm (CW average power), 25VDC</td> </tr> <tr> <td></td> <td>Input connector</td> <td>N connector</td> </tr> </table>	Reference Level	Input Range	+20 ~ -40dBm		Accuracy	Within $\pm 2$ dB (1GHz) ; SPAN : 5MHz		Unit	dBm, dBV, dB $\mu$ V	Average Noise Level		$\leq -100$ dBm (typical, center frequency : 1GHz RBW : 30kHz)	Frequency Characteristic		within $\pm 3.0$ dB@300MHz ~ 2.6GHz			within $\pm 6.0$ dB@80 ~ 300MHz, 2.6 ~ 3GHz	Input	Input Impedance	50 $\Omega$		Input VSWR	less than 2.0@input att $\geq 10$ dB		Input damage level	+30dBm (CW average power), 25VDC		Input connector	N connector
Reference Level	Input Range	+20 ~ -40dBm																													
	Accuracy	Within $\pm 2$ dB (1GHz) ; SPAN : 5MHz																													
	Unit	dBm, dBV, dB $\mu$ V																													
Average Noise Level		$\leq -100$ dBm (typical, center frequency : 1GHz RBW : 30kHz)																													
Frequency Characteristic		within $\pm 3.0$ dB@300MHz ~ 2.6GHz																													
		within $\pm 6.0$ dB@80 ~ 300MHz, 2.6 ~ 3GHz																													
Input	Input Impedance	50 $\Omega$																													
	Input VSWR	less than 2.0@input att $\geq 10$ dB																													
	Input damage level	+30dBm (CW average power), 25VDC																													
	Input connector	N connector																													
<b>SWEEP</b>	<table border="1"> <tr> <td>Sweep Time</td> <td>Setting Range</td> <td>300ms ~ 8.4s, auto (not adjustable)</td> </tr> <tr> <td></td> <td>Accuracy</td> <td>within <math>\pm 2\%</math> (frequency span : full span)</td> </tr> </table>	Sweep Time	Setting Range	300ms ~ 8.4s, auto (not adjustable)		Accuracy	within $\pm 2\%$ (frequency span : full span)																								
Sweep Time	Setting Range	300ms ~ 8.4s, auto (not adjustable)																													
	Accuracy	within $\pm 2\%$ (frequency span : full span)																													
<b>GENERAL</b>	<table border="1"> <tr> <td>Display</td> <td>640 x 480 RGB color LCD</td> </tr> <tr> <td>Communication Interface</td> <td>RS-232C Sub-D female-D 9 pins</td> </tr> <tr> <td></td> <td>USB Connector USB Host/Device full speed supported</td> </tr> <tr> <td>VGA Output</td> <td>Sub-D female 15 pins</td> </tr> <tr> <td>Power Source</td> <td>AC 100~240V, 50/60Hz</td> </tr> </table>	Display	640 x 480 RGB color LCD	Communication Interface	RS-232C Sub-D female-D 9 pins		USB Connector USB Host/Device full speed supported	VGA Output	Sub-D female 15 pins	Power Source	AC 100~240V, 50/60Hz																				
Display	640 x 480 RGB color LCD																														
Communication Interface	RS-232C Sub-D female-D 9 pins																														
	USB Connector USB Host/Device full speed supported																														
VGA Output	Sub-D female 15 pins																														
Power Source	AC 100~240V, 50/60Hz																														
<b>OTHER</b>	<table border="1"> <tr> <td>Operating Temperature</td> <td>5 ~ 45<math>^\circ</math>C (Guaranteed at 25 <math>\pm 5^\circ</math>C, without soft carrying case)</td> </tr> <tr> <td>Operating Humidity</td> <td>Less than 45<math>^\circ</math>C / 90%RH</td> </tr> <tr> <td>Storage Temperature</td> <td>-20 ~ 60<math>^\circ</math>C, less than 60<math>^\circ</math>C / 70%RH</td> </tr> </table>	Operating Temperature	5 ~ 45 $^\circ$ C (Guaranteed at 25 $\pm 5^\circ$ C, without soft carrying case)	Operating Humidity	Less than 45 $^\circ$ C / 90%RH	Storage Temperature	-20 ~ 60 $^\circ$ C, less than 60 $^\circ$ C / 70%RH																								
Operating Temperature	5 ~ 45 $^\circ$ C (Guaranteed at 25 $\pm 5^\circ$ C, without soft carrying case)																														
Operating Humidity	Less than 45 $^\circ$ C / 90%RH																														
Storage Temperature	-20 ~ 60 $^\circ$ C, less than 60 $^\circ$ C / 70%RH																														
<b>DIMENSIONS &amp; WEIGHT</b>	296(L) x 153(W) x 105(H) mm / 11.6(L) x 6(W) x 4.1(H) in, Approx. 2.2kg / 4.9lb																														
GRF-1300A																															
<b>BASE BAND</b>	<table border="1"> <tr> <td>Waveforms</td> <td>Sine, Square, Triangle</td> </tr> <tr> <td>Frequency Range</td> <td>0.1~3MHz , Step : 10kHz</td> </tr> <tr> <td>Amplitude</td> <td><math>\geq 1.5</math>Vpp</td> </tr> <tr> <td></td> <td><math>\geq 0.75</math>Vpp into 50 Ohm</td> </tr> <tr> <td>Harmonic Distortion</td> <td><math>\leq -30</math>dBc</td> </tr> </table>	Waveforms	Sine, Square, Triangle	Frequency Range	0.1~3MHz , Step : 10kHz	Amplitude	$\geq 1.5$ Vpp		$\geq 0.75$ Vpp into 50 Ohm	Harmonic Distortion	$\leq -30$ dBc																				
Waveforms	Sine, Square, Triangle																														
Frequency Range	0.1~3MHz , Step : 10kHz																														
Amplitude	$\geq 1.5$ Vpp																														
	$\geq 0.75$ Vpp into 50 Ohm																														
Harmonic Distortion	$\leq -30$ dBc																														
<b>RF/FM ANALYSIS</b>	<table border="1"> <tr> <td>Frequency Accuracy</td> <td><math>\pm 0.15</math>MHz</td> </tr> <tr> <td>Adjustable Range</td> <td><math>\geq 45</math>MHz (870M ~ 920MHz) , Step : 1MHz</td> </tr> <tr> <td>Power Range</td> <td><math>\geq -15</math>dBm</td> </tr> </table>	Frequency Accuracy	$\pm 0.15$ MHz	Adjustable Range	$\geq 45$ MHz (870M ~ 920MHz) , Step : 1MHz	Power Range	$\geq -15$ dBm																								
Frequency Accuracy	$\pm 0.15$ MHz																														
Adjustable Range	$\geq 45$ MHz (870M ~ 920MHz) , Step : 1MHz																														
Power Range	$\geq -15$ dBm																														
<b>FM</b>	<table border="1"> <tr> <td>Max Frequency Deviation</td> <td><math>&gt; 3</math>MHz</td> </tr> </table>	Max Frequency Deviation	$> 3$ MHz																												
Max Frequency Deviation	$> 3$ MHz																														
<b>AM</b>	<table border="1"> <tr> <td>Peak Difference</td> <td><math>\geq -18</math>dBm</td> </tr> </table>	Peak Difference	$\geq -18$ dBm																												
Peak Difference	$\geq -18$ dBm																														
<b>MIXER</b>	<table border="1"> <tr> <td>LO + IF</td> <td><math>\geq -35</math>dBm</td> </tr> <tr> <td>LO - IF</td> <td><math>\geq -35</math>dBm</td> </tr> </table>	LO + IF	$\geq -35$ dBm	LO - IF	$\geq -35$ dBm																										
LO + IF	$\geq -35$ dBm																														
LO - IF	$\geq -35$ dBm																														
<b>MIXER + MODULATION</b>	$\geq -60$ dBm																														
<b>BANDPASS FILTER</b>	<table border="1"> <tr> <td>Frequency Centre: 2.4GHz</td> <td>Bandwidth: <math>\pm 20</math>MHz</td> </tr> </table>	Frequency Centre: 2.4GHz	Bandwidth: $\pm 20$ MHz																												
Frequency Centre: 2.4GHz	Bandwidth: $\pm 20$ MHz																														
<b>INTERFACE</b>	<table border="1"> <tr> <td>USB Device</td> <td>USB Type B</td> </tr> </table>	USB Device	USB Type B																												
USB Device	USB Type B																														
<b>DIMENSIONS &amp; WEIGHT</b>	165(W) x 155(H) x 90(D)mm, Approx. 1.2kg																														

## ORDERING INFORMATION

<b>GSP-730</b>	3GHz Spectrum Analyzer
<b>GRF-1300/1300A</b>	RF and Communications Trainer
<b>USG-LF44</b>	RF Signal Generator
<b>ADP-003</b>	N type to SMA Adapter

## ACCESSORIES

<b>GSP-730</b>	Quick Start Manual x1, CD-ROM with User Manual x1, Power Cord x1
<b>GRF-1300/1300A</b>	Experiment text book of student version, Power point file and remote control software CD, GRF-1300 : RF cable x 3, Antenna x 1/ GRF-1300A : RF cable x 6, Antenna x 2, N to SMA adaptor connector x 1, Power cord x 1
<b>USG-LF44</b>	USB cable x1, CD-ROM with USG software, Primary RF Software and User Manual x1

## OPTION

<b>GBK-001</b>	GRF-1300 Experiment text book of teacher version
<b>GBK-002</b>	GRF-1300A Experiment text book of teacher version

## FREE DOWNLOAD

<b>PC Software</b>	Primary RF, Remote Control Software, USG Java program
--------------------	---

## SPECIFICATIONS

MODEL	USG-LF44	USG-0103	USG-0818	USG-2030	USG-3044
<b>FREQUENCY RANGE</b>	34.5 MHz ~ 4.4 GHz	100 MHz ~ 300 MHz	800 MHz ~ 1.8 GHz	2.0 GHz ~ 3.0 GHz	3.0 GHz ~ 4.4 GHz
<b>OUTPUT POWER</b>	-30 dBm ~ 0 dBm, in 1 dB steps				
<b>INTERNAL REFERENCE FREQUENCY</b>	25 MHz, aging $\pm 1$ ppm at first year				
<b>FREQUENCY ACCURACY (0 dBm Output Level)</b>	$\pm 100$ Hz at 100MHz	$\pm 100$ Hz at 100MHz	$\pm 800$ Hz at 800MHz	$\pm 2$ kHz at 2GHz	$\pm 3$ kHz at 3GHz
<b>FREQUENCY RESOLUTION</b>	10 kHz				
<b>OUTPUT ISOLATION</b>	$\cong -75$ dBc, Output Control On/Off				
<b>MODE CONTROL</b>	Fixed Frequency / Single Sweep / CW Sweep / Hopping / Power Sweep				
<b>STEP DWELL</b>	$\cong 1000$ ms in 1 ms steps				
<b>FREQUENCY OFFSET</b>	-50 kHz ~ 50 kHz in 10 kHz steps				
<b>OUTPUT FLATNESS (0 dBm Output Level)</b>	-1 dBm ~ 3.5 dBm, typical	-1 dBm ~ -2 dBm, typical	-1 dBm ~ -0.5 dBm, typical	-1 dBm ~ -0.5 dBm, typical	-1 dBm ~ 3.5 dBm, typical
<b>PHASE NOISE</b> Carrier Frequency at 10kHz Offset Frequency  at 100kHz Offset Frequency	fc = 1.0 GHz < -97 dBc/Hz, typical -100 dBc/Hz < -107 dBc/Hz, typical -110 dBc/Hz	fc = 200 MHz < -100 dBc/Hz, typical < -110 dBc/Hz, typical	fc = 1.3 GHz < -97 dBc/Hz, typical < -102 dBc/Hz, typical	fc = 1.5 GHz < -93 dBc/Hz, typical < -100 dBc/Hz, typical	fc = 3.7 GHz < -88 dBc/Hz, typical < -94 dBc/Hz, typical
<b>2ND HARMONICS (0 dB Attenuation)</b>	$\cong -15$ dBc, typical 34.5 MHz ~ 2.0 GHz $\cong -10$ dBc, typical 2.0 GHz ~ 3.0 GHz $\cong -25$ dBc, typical 3.0 GHz ~ 4.4 GHz	$\cong -45$ dBc, typical > 100 MHz	$\cong -25$ dBc, typical > 800 MHz	$\cong -30$ dBc, typical 2.0 GHz ~ 3.0 GHz	$\cong -25$ dBc, typical 3.0 GHz ~ 4.4 GHz
<b>3rd HARMONICS (0 dB Attenuation)</b>	$\cong -5$ dBc, typical 34.5 MHz ~ 2 GHz $\cong -20$ dBc, typical 2.0 GHz ~ 3.0 GHz $\cong -40$ dBc, typical 3.0 GHz ~ 4.4 GHz	$\cong -7$ dBc typical $\cong 150$ MHz $\cong -35$ dBc, typical > 150 MHz	$\cong -25$ dBc, typical $\cong 900$ MHz $\cong -35$ dBc, typical > 900 MHz	$\cong -55$ dBc, typical 2.0 GHz ~ 3.0 GHz	$\cong -40$ dBc, typical 3.0 GHz ~ 4.4 GHz
<b>SPURIOUS RELATED TO RESOLUTION SETTINGS</b>	$\cong -30$ dBc, typical, Resolution < 1MHz $\cong -65$ dBc, typical, Resolution $\cong 1$ MHz				
<b>SPURIOUS RELATED TO THE FUNDAMENTAL OUTPUT</b>	$\cong -60$ dBc, typical	$\cong -60$ dBc, typical	$\cong -65$ dBc, typical	$\cong -65$ dBc, typical	$\cong -65$ dBc, typical
<b>SUPPORTED OS</b>	Windows/Linux/Mac/Android				
<b>INTERFACE</b>	USB 2.0				
<b>USB CONNECTOR TYPE</b>	Mini B				
<b>SUPPLY VOLTAGE</b>	5V nominal				
<b>CURRENT CONSUMPTION</b>	200 mA				
<b>RF CONNECTOR TYPE</b>	N-type male				
<b>IMPEDANCE</b>	50 $\Omega$ nominal				
<b>OUTPUT VSWR</b>	< 1.5 : 1, Output Level @ -30 dBm				
<b>MAXIMUM PERMISSIBLE DC VOLTAGE</b>	$\pm 25$ V				
<b>MAXIMUM REVERSE POWER</b>	+30dBm (1W)				
<b>ELECTROMAGNETIC COMPATIBILITY</b>	EN 55011 class A, EN 61326-1 (industrial environment), EN 61326-2-1, EN 61000-4-2, EN 61000-4-3 EN 61000-4-11				
<b>DIMENSIONS &amp; WEIGHT</b>	30(W) x 103(H) x 30(D)mm; Approx. 100g				

Specifications subject to change without notice.

USGGD1DH

Combined Test Solutions,  
4 Commerce Way, Stanbridge Road,  
Leighton Buzzard, LU7 4RW

T: 01525 374466  
E: [sales@ctstest.co.uk](mailto:sales@ctstest.co.uk)  
W: [www.ctstest.co.uk](http://www.ctstest.co.uk)

